JIOUTE

吉欧特门窗
JIOUTEMENCHUANG

苏州吉欧特门窗制造有限公司
Suzhou jioute door and window manufacturing Co., Ltd.

联系人： 褚经理18662565717/邱经理13301558886
地　址： 苏州市吴江区黎里镇金家坝金周公路1975号

JIOUTE

苏州吉欧特门窗制造有限公司

Suzhou jioute door and window manufacturing Co., Ltd.

Into Jioute

走进吉欧特

研发　生产　销售　售后

苏州吉欧特门窗制造有限公司座落于被誉为“全国最大的空气净化之都”、“全国彩钢板生产密集区”的苏州金家坝，水陆交通十分便利，是典型的江南鱼米之乡。吉欧特净化门窗秉承开拓创新、持续改进、品质为王、永续经营的企业理念立足于净化门窗行业之中。

吉欧特门窗主要生产各种规格钢制净化门、不锈钢净化门、不锈钢固定窗、双层玻璃固定窗等安装在彩钢板手工板及土建墙上的各种净化门窗。一步一个脚印，点点滴滴的积累，终于使吉欧特门窗成长为行业中的知名品牌。所有的这些荣誉，是对我们的肯定，是市场和客户对我们无上的褒奖，在以后的发展中，我们会一如既往的坚持我们优秀的经营理念，为广大客户提供更优秀的产品。激烈的市场竞争造就了吉欧特门窗坚韧不拔的品格，过硬的品质质量造就了吉欧特门窗独有的企业风格，竭诚欢迎您的来电，期待与您的合作。

Jioute door and window manufacturing Co., Ltd. is located in Jinjiaba, Suzhou, known as "the largest air purification capital in China" and "the national color steel plate production intensive area". The water and land transportation is very convenient. It is a typical land of fish and rice in the south of the Yangtze River. Adhering to the enterprise philosophy of development and innovation, continuous improvement, quality as king and sustainable management, Jioute purification doors and windows is based on the purification doors and windows industry.

Jioute door and window mainly produce various specifications of steel purification doors, stainless steel purification doors, stainless steel fixed windows, double-layer glass fixed windows, etc. all kinds of purification doors and windows installed on color steel manual plates and civil walls. Step by step, bit by bit accumulation, and finally make giot doors and windows grow into a well-known brand in the industry. All these honors are our affirmation and the supreme praise of the market and customers. In the future development, we will always adhere to our excellent business philosophy and provide our customers with better products. The fierce market competition has created the indomitable character of Jioute door and window, and the excellent quality has created the unique enterprise style of Jioute door and window. We sincerely welcome your call and look forward to cooperation with you.



企业愿景

愿景：

国内净化门窗行业领跑者，国际新兴市场知名品牌

使命：

以卓越技术和专业服务，为您提供更优质的净化门窗

核心价值观：

尊重客户、互利共赢、长期合作

尊重个性、业绩导向、共同成长

透明开发、坦诚交流、相互包容

企业精神：

严谨、务实 、团结、拼搏 、开拓、创新

Vision:

It is a leader in the domestic purification door and window industry and a well-known brand in international emerging markets

mission:

With excellent technology and professional services, we will provide you with better purification doors and windows

Core values:

Respect customersMutual benefit and win-win,Long-term coopera-tion,Respect personality, Performance orientation, common growth,Ransparent development,Frank communication,mutual tolerance

Enterprise spirit:

Rigorous, pragmatic, United, hardworking, pioneering and innovative

Equipment products

设备产品



















Contents

目录



中置式钢制门
Medium Steel Double Door

PAGE 07-08



对夹式钢制门
Wafer type steel door

PAGE 09-10



不锈钢门
Stainless steel door

PAGE 11-12



土建门
Emergency door

PAGE 13-14



安全门
Emergency door

PAGE 15-15



防火门
Fire-proof door

PAGE15-15



配件
parts

PAGE 15-15



手动/ 自动平移门
Manual / automatic swing door

PAGE 17-18



PVC快速卷帘门
PVC fast rolling shutter door

PAGE 19-20



自由防撞门
Free anti-collision door

PAGE 21-22



双层净化视窗
Double layer purification window

PAGE 23-24



其他产品
Other products

PAGE 25-37

C 中置式钢制门
enter-mounted steel door



适用于手工板，广泛应用于彩钢板墙体净化工程，涵盖医药、食品、化妆品、电子制造行业

Applicable to hand- made board, widely used in color steel wall cleaning engineering, covering medicine, food,cosmelics, electronics manutacturing industry


颜色（可选）/ Color (optional)



*仅供参考，以实际色卡为准

* For reference only, the actual color card shall prevail

结构示意图/ Structure diagram

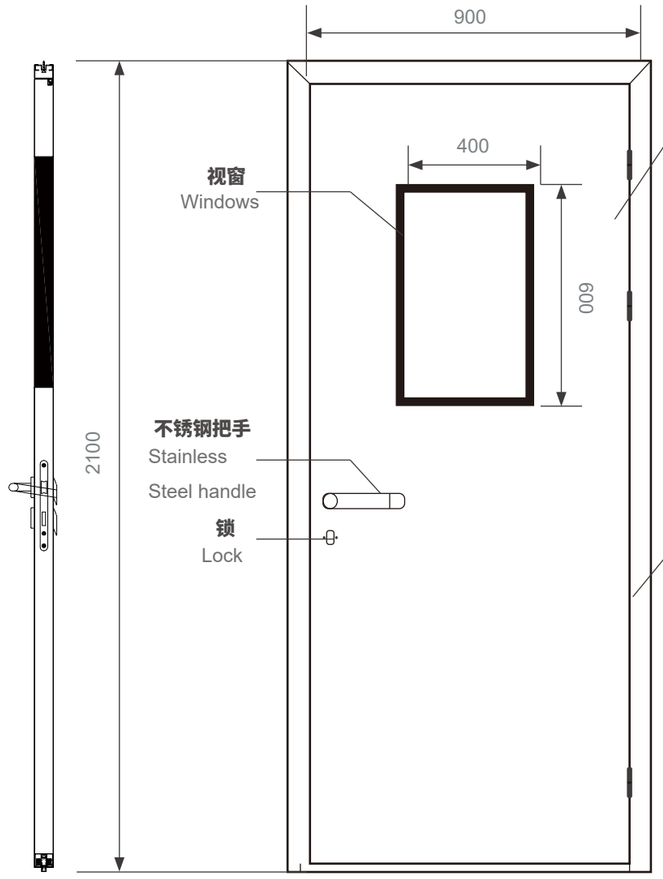

门板
Door panel


门板采用0.8mm以上厚优质冷轧钢板制造，表面烤漆，表面静电粉末喷涂处理

The door panel is made of high quality cold rolled steel plate with thickness of more than 0.8mm. The surface is painted and the surface is treated by electrostatic powder spraying.

门框
Door frame

采用1.2mm以上厚优质冷轧钢板折弯成型，表面静电粉末喷涂处理

It is made of high quality cold rolled steel plate with thickness of more than 1.2mm by bending and forming, and the surface is treated by electro-static powder spraying



*可按需求方工程要求定长定宽，组合安装

* can be fixed length and width according to the requirements of the demand side of the project, combined installation

芯材（可选）/ Core material (optional)



W对夹式钢制门
afer type steel door



门框采用分体式，对夹于墙体材料，用不锈钢螺丝固定，多用于机制板墙体。

The door frame is split and clamped to the wall material and fixed with stainless steel screws,It is mostly used for machine-made board wall.

颜色（可选）/ Color (optional)




灰白板　3300　2173c　7697c　726c　284c　不锈钢

*仅供参考，以实际色卡为准

* For reference only, the actual color card shall prevail

结构示意图/Structure diagram

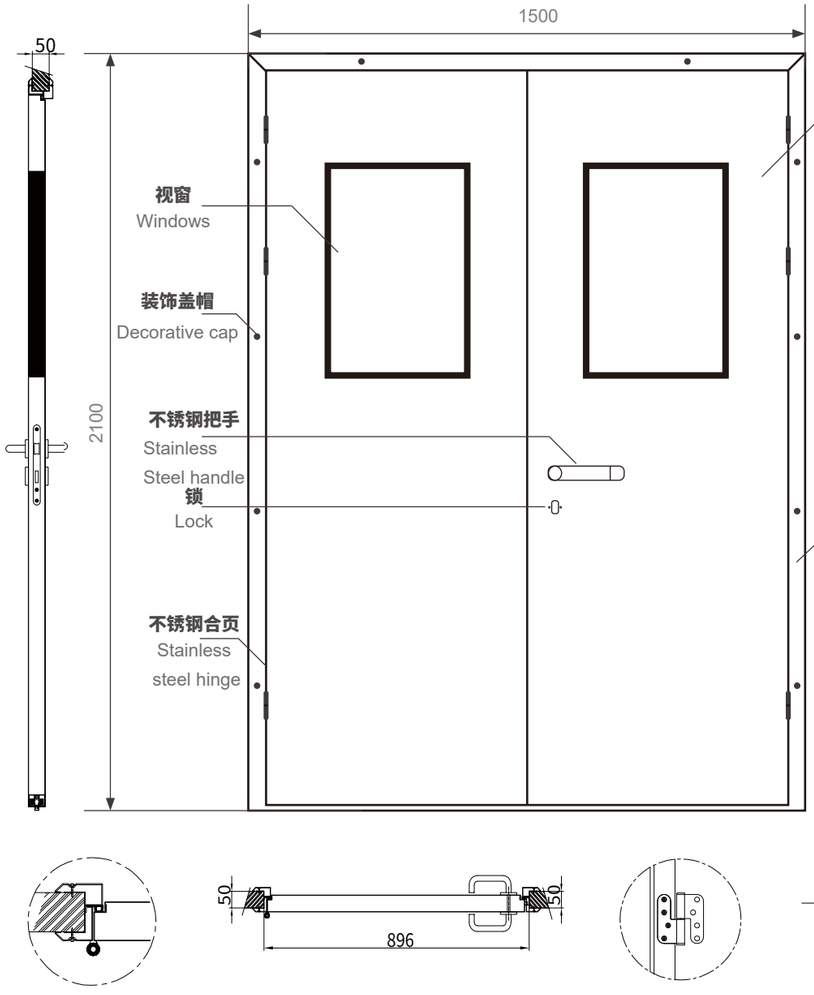

镀锌门板

Galvanized door panel

门板采用0.8mm以上厚优质冷轧钢板制造，表面烤漆，表面静电粉末喷涂处理

The door panel is made of high quality cold rolled steel plate with thickness of more than 0.8mm. The surface is painted and the surface is treated by electrostatic powder spraying

冷轧板门框

Cold rolled door frame

采用1.2mm以上厚优质冷轧钢板折弯成型，表面静电粉末喷涂处理

It is made of high quality cold rolled steel plate with thickness of more than 1.2mm by bending and forming, and the surface is treated by electrostatic powder spraying

*可按需求方工程要求定长定宽，组合安装

* can be fixed length and width according to the requirements of the demand side of the project, combined installation

芯材（可选）/ Core material (optional)



纸蜂窝 Paper honeycomb　铝蜂窝 Aluminum honeycomb　岩棉 Rock wool　挤塑板 Plastic extruded board

S不锈钢门
tainless steel door



广泛应用于彩钢板墙体净化工程，涵盖医药、食品、化妆品、电子制造行业。

It is widely used in color steel plate wall purification engineering, covering medicine, food, cosmetics and electronic manufacturing industries.

特点/characteristic


1.洁净门的开启方式可分为：单门左开式、右开式；双门分为内开式，外开式；可分别增设观察窗。

2.适用于彩钢板、土建墙、轻钢龙骨结构等。

3.防火耐用、外表美观、易清洁、开启方便、密闭性好。

1. The opening mode of the clean door can be divided into: single door left open and right open; The double door is divided into internal opening and external opening; Observation windows can be added respectively.
2. Applicable to color steel plate, civil wall, light steel keel structure, etc.
3. Fireproof and durable, beautiful appearance, easy to clean, easy to open and good tightness.

结构示意图/Structure diagram

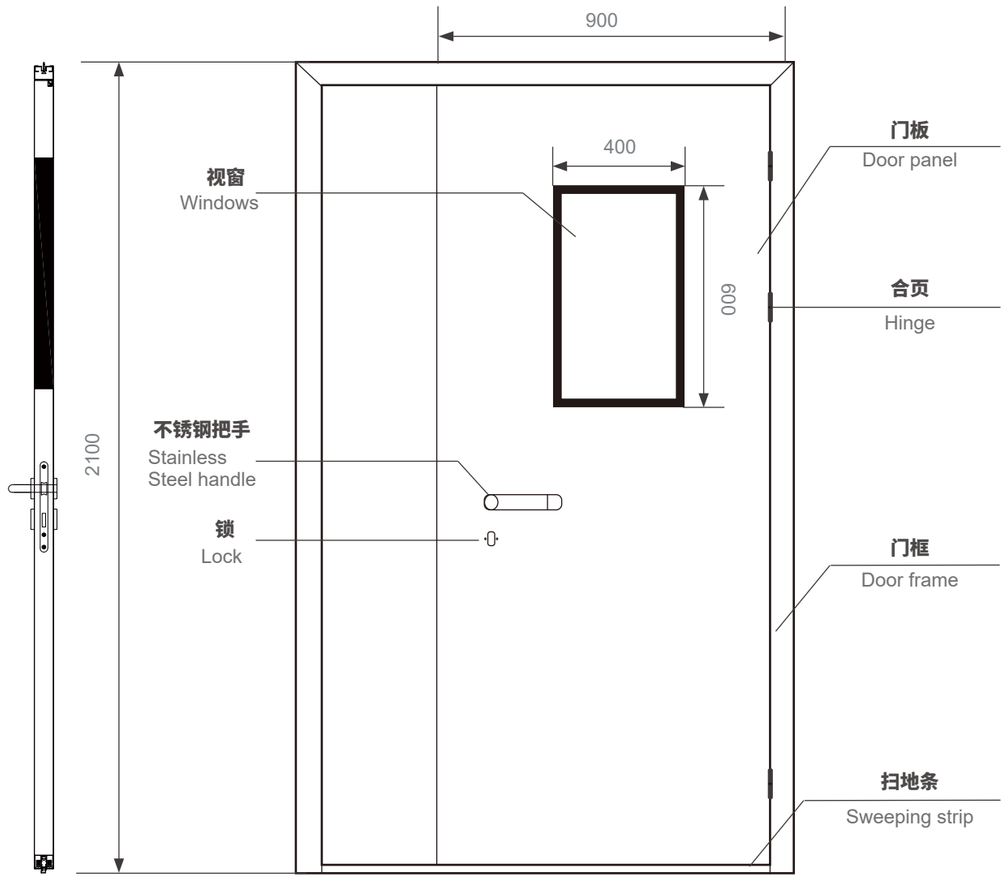

*可按需求方工程要求定长定宽，组合安装

* can be fixed length and width according to the requirements of the demand side of the project, combined installation

芯材（可选）/ Core material (optional)



纸蜂窝
Paper honeycomb

铝蜂窝
Aluminum honeycomb

岩棉
Rock wool

挤塑板
Plastic extruded board

土建门 mergency door



不锈钢合页
Stainless steel hinge

闭门器（选配，可明装，暗装）
Door closer
(optional, open or concealed)

不锈钢把手、锁
Stainless steel handle
Lock

双层观察窗
Double layer
observation window

硅胶条
Silica gel

304不锈钢板/镀锌板
304 stainless steel plate
Galvanized sheet

升降扫地条
Lifting broom

回风口(选配)
Return air outlet (optional)


多用于医院等大型公共洁净场所
It is mostly used in large public clean places such as hospitals

颜色（可选）/ Color (optional)

灰白板 | 3300 | 2173c | 7697c | 726c | 284c | 不锈钢

*仅供参考，以实际色卡为准
* For reference only, the actual color card shall prevail

结构示意图/Structure diagram

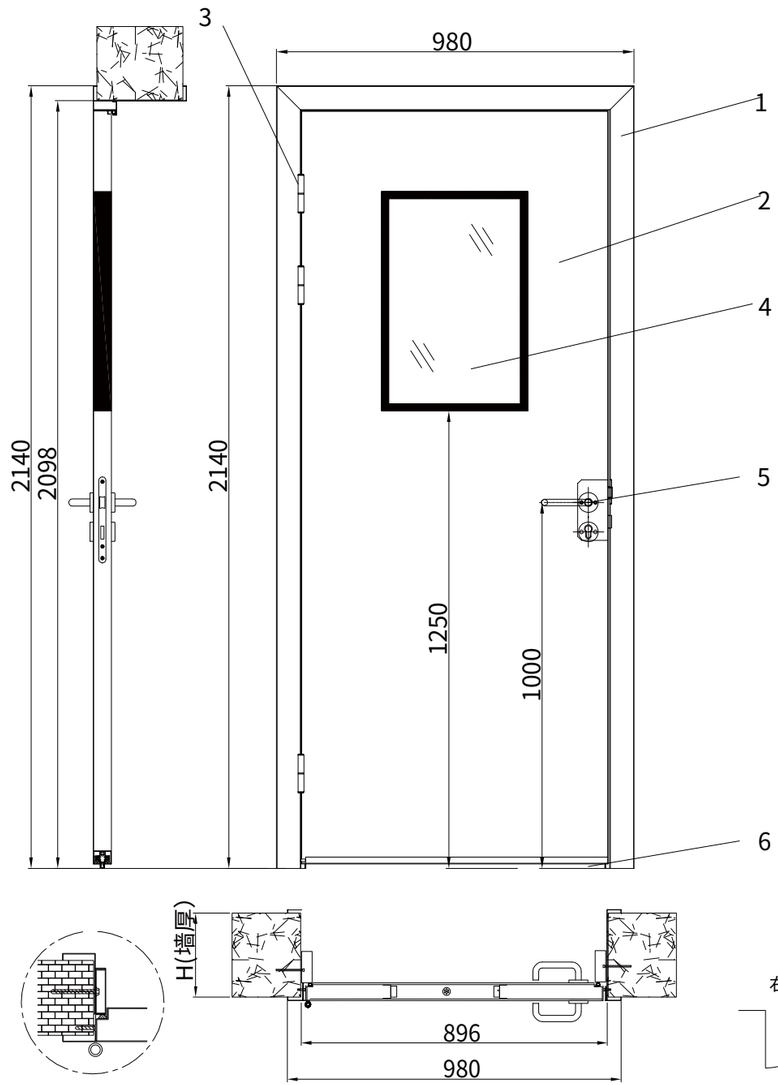

1.门框1.2mm烤漆
2.0.8mm烤漆门板,芯材纸蜂窝
3.不锈钢合页3副
4.5mm黑边直角双层钢化玻璃400*600丝印20mm宽
5.不锈钢执手锁
6.升降扫地条
1. Door frame 1.2mm baking paint
2.0.8mm paint baking door panel, core material, paper honeycomb
3. Stainless steel hinge 3 sets
4.5mm black edge right angle double-layer tempered glass 400 * 600 screen printing 20mm wide
5. Stainless steel handle lock
6. Lifting broom

*可按需求方工程要求定长定宽，组合安装
* can be fixed length and width according to the requirements of the demand side of the project, combined installation

芯材（可选）/ Core material (optional)



纸蜂窝
Paper honeycomb

铝蜂窝
Aluminum honeycomb

岩棉
Rock wool

挤塑板
Plastic extruded board

S 安全逃生门
afe escape door

安全逃生门采用钢质材料制作平整光洁耐磨，门中空钢化玻璃观察窗便于观察室内情况，具有防火、耐用、气密性强等特点。

The safety escape door is made of steel material, which is smooth, smooth and wear-resistant. The hollow tempered glass observation window of the door is easy to observe the indoor conditions, and has the characteristics of fire prevention, durability and strong air tightness.



F 防火门
ire-proof door

钢质防火门是指用钢质材料制作门框、门扇骨架和门扇面板，门扇内若填充材料，则填充对人体无毒无害的防火隔热材料，并配以防火五金配件所组成的具有一是指定耐火性能的门。

Steel fire door refers to a door with specified fire resistance, which is made of steel materials for door frame, door leaf frame and door leaf panel. If the door leaf is filled with materials, it is filled with non-toxic and harmless fire insulation materials for human body, and equipped with fire-proof hardware accessories.



P 配件
arts



开门机
Door opener



不锈钢把手
Stainless steel handle



碰珠
Touch bead



闭门器
Door closer



门禁
Access control



门吸
Door suction




电子互锁
Electronic interlock



回风百页
Return air hundred pages


C 洁净气密门特性
lean airtight door characteristic



不锈钢合页
Stainless steel hinge
不锈钢材质，在可靠耐用的同时，又能达到抗菌抑菌的效果



不锈钢把手、锁
Stainless steel handle Lock
肘压式门把手、不锈钢材质，在可靠耐用的同时，又能达到抗菌抑菌的效果



升降扫地条
Lifting broom
根据客户定制门板底部使用升降式扫地条，既美观又气密





双层观察窗
Double layer observation window
双层中空钢化玻璃：美观大方，隔热隔音



304不锈钢板/镀锌板
304 stainless steel plate Galvanized sheet
无花镀锌板喷塑/不锈钢，抗冲击、耐磨、阻燃、防潮、抗菌、抗污、个性化等特点



硅胶条
Silica gel
我们采用机注聚氨酯密封条代替传统的粘贴式硅胶密封条，由全自动数控涂胶机一次成型，精确控制密封条高度及弹性，气密性更好，不易脱落更具耐用性。

M 手动/自动平移门
anual / automatic swing door



数位式智能化控制系统，调节简便，抗干扰性好，系统稳定。采用双芯片协调工作，内置自动校准算法程序和保护程序，使门体移动更加平稳。输入采用按钮调节方式，只需手指轻轻一按，即可设定程序，采用数码管显示，简单易懂，调节简便精准。具有互锁功能。有刷电机，采用德国蜗轮蜗杆技术，效率高、扭矩大、使用寿命长。

The digital intelligent control system has the advantages of simple adjustment, good anti-interference and stable system. Dual chips are used for coordinated work, and automatic calibration algorithm program and protection program are built in to make the door move more smoothly. The input adopts the button adjustment mode. Just press with your finger to set the program. It adopts nixie tube display, which is simple and easy to understand, and the adjustment is simple and accurate. It has interlocking function. Brush motor adopts German worm gear technology, with high efficiency, large torque and long service life.

芯材（可选）/ Core material (optional)



纸蜂窝 Paper honeycomb | 铝蜂窝 Aluminum honeycomb | 岩棉 Rock wool | 挤塑板 Plastic extruded board

颜色（可选）/ Color (optional)




灰白板 | 3300 | 2173c | 7697c | 726c | 284c | 不锈钢

*仅供参考，以实际色卡为准

* For reference only, the actual color card shall prevail

结构示意图/ Structure diagram

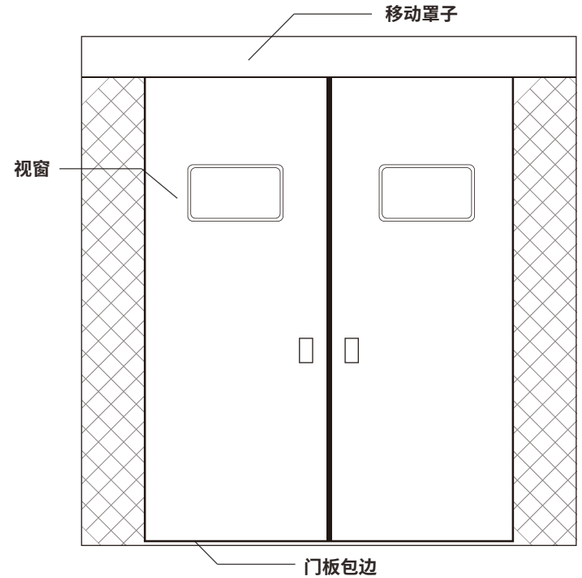

配件/ parts



自动门控制器 | DC有刷电机 | 微波感应器 | 红外感应探头 | 无线手压开关



可视对讲门禁机 | 读卡密码门禁盘 | 手感应开关 | 脚感应开关 | 按压开关



遥控器 | 安全光线 | 自动门玻璃门夹 | 工作中LED灯箱 | 手术中LED灯箱

PVC快卷门
VC quick rolling door



快速卷门是快速升降的无障碍隔离门，主要功能是保湿、防尘、防虫、防异味等，使车间保持恒温、恒湿、洁净的工作环境。
广泛用于食品、化学、纺织、电子、印刷、超市、冷冻、装配、精密机械、物流、汽车、卷烟、仓储等多种行业的空调车间和洁净厂房。这种高速自动开启与关闭的快卷门，在寻求严格的质量管理和高效率，节俭经费的工厂、仓库、店铺等处，出入口的有效开闭是决定商品的安全性与生产经营效率的最大关键。


Fast rolling door is a barrier free isolation door with rapid lifting. Its main functions are moisturizing, dustproof, insect proof and odor proof, so as to maintain a constant temperature, humidity and clean working environment in the workshop.
It is widely used in air conditioning workshops and clean workshops in food, chemistry, textile, electronics, printing, supermarket, refrigeration, assembly, precision machinery, logistics, automobile, cigarette, warehousing and other industries. This high-speed automatic opening and closing fast rolling door is the biggest key to determine the safety of goods and the efficiency of production and operation in factories, warehouses and stores that seek strict quality management, high efficiency and economical funds.

颜色（可选）/ Color (optional)



*仅供参考，以实际色卡为准
* For reference only, the actual color card shall prevail

结构示意图/Structure diagram

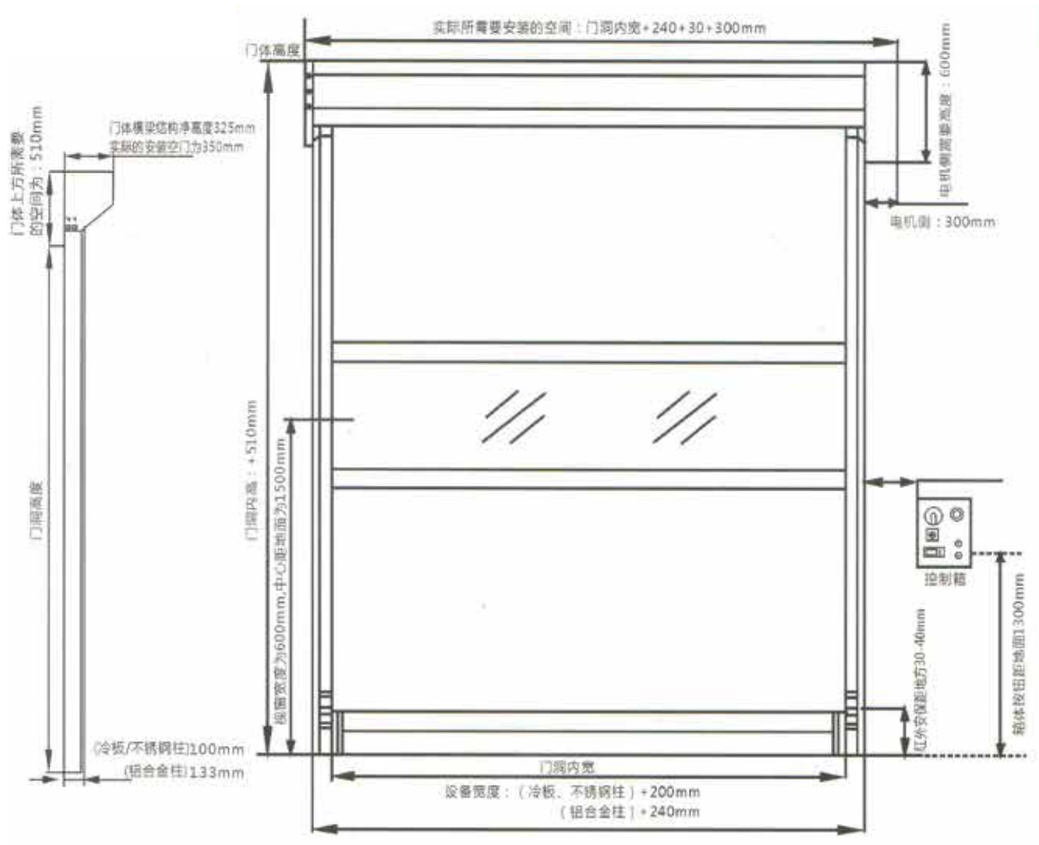

*可按需求方工程要求定长定宽，组合安装
* can be fixed length and width according to the requirements of the demand side of the project, combined installation

F 自由防撞门
ree Impact door



自由防撞门是目前工业车间使用最高的自由门，门板采用不锈钢材料，门体两侧加防撞橡胶板，具有透明、安全、轻巧、免动力、无噪音、安装简便、耐腐蚀、使用寿命长等特点。

Free anti-collision door is the highest free door used in industrial workshops at present. The door panel is made of stainless steel and anti-collision rubber plates are added on both sides of the door body. It has the characteristics of transparency, safety, lightness, power free, no noise, simple installation, corrosion resistance and long service life.


颜色（可选）/ Color (optional)



*仅供参考，以实际色卡为准

* For reference only, the actual color card shall prevail

结构示意图/ Structure diagram

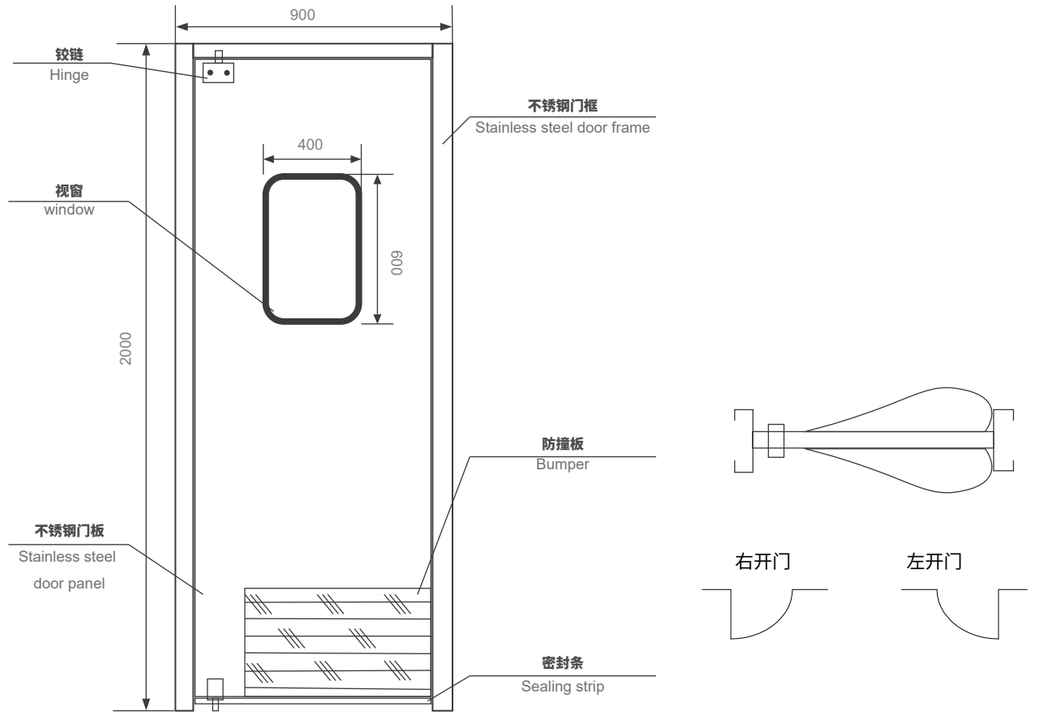



*可按需求方工程要求定长定宽，组合安装

* can be fixed length and width according to the requirements of the demand side of the project, combined installation

D 双层净化视窗
ouble layer purification window


周边框磨砂，丝网印刷，有圆角边、直角边、等多种款式。双层玻璃，充氮处理，内含干燥机，有效防止受潮、起雾。密封性好、隔音隔热、节能环保。

Framing frosted, screen printing, a rounded edge, right Angle edge, and other styles. Double - layer glass, nitrogen - filled treatment, containing dryer, effectively prevent damp, fog.Good sealing, sound insulation and heat insulation, energy saving and environmental protection.






结构示意图/Structure diagram

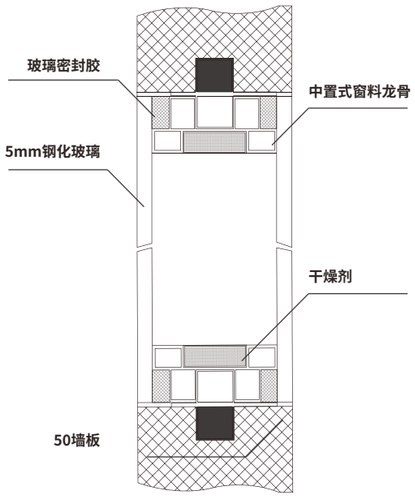

50中置式双层视窗示意图
50 center-mounted double-layer window schematic

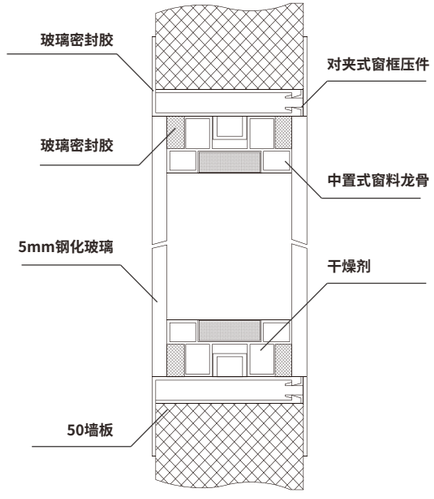

50对夹式双层视窗示意图
50 pairs of double-layer windows



可拆边框，配套机制墙体

Removable frame,
matching mechanism wall




双层玻璃固定窗用新型窗由内外两层玻璃构成，中间为一空气层

The new type of window for double glass fixed window is composed of two layers of glass inside and outside, with an air layer in the middle



双层玻璃具有隔音、防结露和良好的保温隔热性能

Double layer glass has sound insulation, anti condensation and good thermal insulation performance

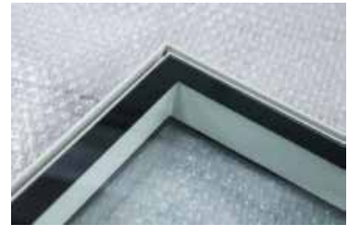

边角展示，内直角嵌不锈钢装饰条

Corner display, right angle inlaid with stainless steel decorative strip



干燥剂孔保持双层玻璃窗内干燥不潮湿

The desiccant hole keeps the double glass window dry and not wet



铝合金包边，结构合理，安装简单，美观实用，气密性好

Aluminum alloy edge, reasonable structure, simple installation, beautiful and practical, good air tightness

M 手工板
anual sandwich board

手工板是针对普通净化板强度弱，黏结差等诸多缺点所开发设计的一种加强型的复合夹芯板。产品系半机械结合手工生产，可按需方工程要求定长定宽，组合安装，且能多次拆装，施工安装方便，综合效果十分显著。

Handmade board is a kind of strengthened composite Sandwich Board, which is developed and designed for the weakness of common purifying board and poor bonding. The product is semi-mechanical and hand-made. The length and width can be fixed according to the requirement of demand-side engineering.

表面材质：彩涂钢板、镀锌板、不锈钢板、抗静电板、耐腐蚀板等净化特定材质板。

内部芯材：芯材可采用岩棉、纸(铝)蜂巢、聚氨酯(PU)、聚苯乙烯(EPS)、挤塑(PE)、中空玻镁板、硅岩板、硫氧镁板、玻镁板、石膏板等。

结构边框：四周采用镀锌钢带龙骨、铝型材龙骨或塑钢龙骨。

产品特点：手工板具有高强度、隔音、绝热、保温抗震、尺寸可定制、连接方便、拆卸容易、芯材不外露、施工方便等性能。

规格型号：彩板厚度一般用0.426mmt~0.7mmt；
厚度:50mmt、75mmt、100mmt、150mmt、200mmt；
宽度：常用1180mm、1150mm、980mm，非标板任意宽度；
长度：可根据需求制作;
连接：常用中字铝、中字铁及企口连接；

应用范围：广泛用于高科技电子、医药、化工、食品等行业的净化房围护、吊顶，工业厂房、仓库、冷库、烤炉、空调器壁板等洁净领域。

产品多样：有岩棉彩钢板、玻镁岩棉彩钢板、中空玻镁彩钢板、聚氨酯彩钢板、铝(纸)蜂窝彩钢板、石膏岩棉彩钢板、硅岩彩钢板、硫氧镁彩钢板。也可根据客户需求制作特殊芯材、特殊规格的板材。

理化性能：产品钢面为高级聚酯烘烤涂层、铝锌涂层、不锈钢板，故耐腐蚀性好；芯材可依客户需求定制，是目前国内高等级的防火建筑装饰复合板，产品强度高、耐冲击、抗震性好。

Surface Material: Color coated steel plate, galvanized plate, stainless steel plate, antistatic plate, corrosion-resistant plate such as purification of the specific material board.

Internal core material: Core materials can be used rock wool, paper aluminum honeycomb, polyurethane Pu, EPS, extruded PE, hollow glass magnesium plate, silicon rock plate, magnesium oxysulfide plate, glass magnesium plate, Gypsum Board.

Structural Frame: Around the frame or steel frame galvanized sheet cold drawing.

Product Features: Handmade board with high strength, sound insulation, thermal insulation, thermal insulation, anti-seismic, size can be customized, easy connection, easy disassembly, core material not exposed, easy construction and so on.

Specification: Color plate thickness with 0.426mmt 0.7mmt;

Thickness: 50mmt, 75mmt, 100mmt,150mmt,200mmt;

Width: Commonly used in 1180mm, 1150mm, 980mm, non-standard panels of any width;

Length: According to the needs of production;

Connections: Commonly used in the word aluminum, in the words of iron and tongue and groove connection.

Applications: Widely used in high-tech electronics, medicine, chemical industry, food industry clean room envelope, ceiling, industrial plants, warehouses, cold storage, ovens, air conditioners siding and other clean areas.

Variety of products: There are rock wool color steel plate, glass magnesium rock wool color steel plate, hollow glass magnesium color steel plate, polyurethane color steel plate, aluminum paper honeycomb color steel plate, gypsum rock wool color plate, silicon rock color steel plate, magnesium oxysulfide color steel plate. Also according to the customer to make special core materials, special specifications of the plate.

Physlcal and chemical properties: The steel surface of the products is high-grade polyester baking coating, aluminum-zinc coating, stainless steel plate, so the corrosion resistance is good; the core material can be customized according to customer demand, is currently high-grade fire-proof building decoration composite plate, the product has high strength, impact resistance and good shock resistance.

岩棉净化手工板
Rock wool purification manual board

构成：双层钢板，内夹岩棉矿棉夹芯材料，采用手工制作工艺。岩棉又称岩石棉是矿物棉的一种，以天然岩石及矿物等原料制成的蓬松状短细纤维，不可燃。

优点：防火性能好、隔音绝热性高。

应用：广泛应用于食品、制药、电子、科研、航天、医疗等行业的厂房、实验室及各种场所功能性隔断及吊顶。



Composition: Double steel plate, clip the rock wool mineral wool sandwich materials, hand-made craft. Rock wool, also known as rock wool, mineral wool a fluffy short fine fibers made of natural rock and mineral raw materials, non-combustible.

Advantages: Good fireproofing performance, high noise insulation

Application: Widely used n the partition and ceiling of the functionalit lity of the plant laboratories and various places of the food, pharmaceutical, electronics, scientific research aerospace, medical and other industries.

单面（双面）石膏岩棉净化手工板
Single-sided (double-sided) gypsum rock wool cleaning handboard

构成：彩涂板+石膏+岩棉+石膏+彩涂板，采用手工制作工艺

优点：防火性能好、强度较高、隔音绝热性高。

应用：广泛应用于食品、制药、电子、科研、航天、医疗等行业的厂房、实验室及各种场所功能性隔断及吊顶。



Composition: Color-coated gypsum rockwool gypsum color-coated, and handmade crafts.

Advantages: Fire performance, high strength, high noise insulation.

Application: Widely used in the partition and ceiling of the functionality of the plant, laboratories and various places of the food, pharmaceutical, electronics, scientific research,aerospace, medical and other industries.

单面（双面）玻镁岩棉净化手工板
Single-sided (double-sided) glassy magnesite cotton cleaning hand plate

构成: 彩涂板+玻镁+岩棉+玻镁+彩涂板，采用手工制作工艺。
优点: 防火性能好、隔音绝热性高。
应用: 广泛应用于食品、制药、电子、科研、航天、医疗等行业的厂房、实验室及各种场所功能性隔断及吊顶。

Composition：Color coating board + glass magnesium + rock cotton + glass magnesium + color coating board, using manual production process.
Advantages：Good fire resistance, sound insulation and heat insulation.
Application：Widely used in food, pharmaceutical, electronic, scientific research, aerospace, medical and other industries, workshops, laboratories and various places functional partition and ceiling.



纸蜂窝净化手工板
Paper honeycomb purification manual board

构成: 彩涂板+阻燃性纸蜂窝芯材+彩涂板，采用手工制作工艺。
优点: 隔音绝热性好、自重较轻。
应用: 广泛应用于食品、制药、电子、科研、航天、医疗等行业的厂房、实验室及各种场所功能性隔断及吊顶。

Composition：Color-coated&Flame-retardant paper honeycomb&rockwool&color-coated,and handmade crafts.
Advantages：Good noise insulation,light weight.
Application：Widely used in food,pharmaceutical,electronics,scientific research,aerospace,medical and other industries of the plant,laboratory,and a variety of places functional partition and ceiling,and is especlally suitable for high purity level electronics manufacturing plant.



铝蜂窝净化手工板
Al honeycomb purifying hand plate

构成: 彩涂板＋铝蜂窝芯材＋彩涂板，采用手工制作工艺。
优点: 隔音绝热性好、自重较轻。
应用: 广泛应用于食品、制药、电子、科研、航天、医疗等行业的厂房、实验室及各种场所功能性隔断及吊顶、尤其适用于高洁净级别的电子生产车间。

Composition：Color coated plate + aluminum honeycomb core material + color coated plate, using hand-made process.
Advantages：Sound insulation good, Light self-weight.
Application：Widely used in food, pharmaceutical, electronics, scientific research, aerospace, medical and other industries, workshops, laboratories and various places functional partition and ceiling, especially for high-clean level of electronic production workshop.



M机制板
achine-made sandwich board

泡沫彩钢净化板
Eps purification board

构成：采用阻燃型EPS为芯材，热镀锌彩涂板为面层(两层)及高强度粘剂，通过高速连续自动化成型机加温、加压复合，裁切、修边而成的新一代建筑装潢板材。
规格：
宽度：950、1150mm
厚度：50、75、100、150、200mm
长度：按工程要求及运输条件定做
颜色：按工程要求选取
品种：H板(平板、压型)、企口板、瓦楞夹芯板
性能及质量标准：
自重：10.0-13.6kg/m²
导热系数：0.034-0.037w/m.k
氧指数(oi)：34.0(省消防产品质检站)
隔声性能：19dB(A)(75mm厚)
芯材：聚苯乙烯泡沫塑料板应符合GB10801的规定，体积密度不小于12KGm³,导热系数不大于0.041W/(mk)，阻燃性(ZR)，氧指数不小于30%
粘结剂：粘结强度应大于0.1Mpa
剥离性能：剥离实验时，粘结在面材上的聚苯乙烯泡沫塑料粒子应均匀分布，每个剥离面的粘结面积应不小于85%


Composition：Using flame-retardant EPS as the core material, hot-dip galvanized color coated sheet as the surface layer of two layers and high-strength adhesive, through high-speed continuous automatic molding machine heating, pressure compound, cutting, trimming the edge of a new generation of building decoration board.
Specification：
Width：950、1150 mm
Thickness：50、75、100、150、200 mm
Length：According to engineering requirements and transportation conditions custom
Color：According to engineering requirements to select
Varieties：H plate, compression type, plate, corrugated core plate
Performance and quality standard：Deadweight: 10.0-136 kg /m²
Thermal conductivity：0.034-0.037 W /m.k
O Index Oi：34.0 provincial fire product quality inspection station
Sound insulation performance：19 dB (A) (75 mm thick)
Core material：Polystyrene Foam plastic plate should comply with the requirements of GB10801, the volume density is not less than 12 KGm³, thermal conductivity is not more than 0.041 W /(mk), Flame Retardant(ZR), oxygen index is not less than 30%
Binder：Bonding strength should be greater than 0.1 Mpa
Peeling performance：Peeling Experiment, the polystyrene foam particles bonded to the surface material should be evenly distributed, each peeling surface area should not be less than 85%



岩棉彩钢净化板
Rockwool purification board

构成：采用中高密度岩棉为芯材，彩涂板为面层(两层)及高强度粘剂，通过高速连续自动化成型机加温、加压复合，经过裁切、修边而成的新一代建筑装潢板材，具有保温隔热、安装便捷的特点。是同类(夹芯板系列)中耐火性能最强的一种新型防火板材。
规格：宽度：950、1150mm
厚度：50、75、100、150、200mm
长度：按工程要求及运输条件定做
颜色：按工程要求选取
品种：企口板、瓦楞夹芯板(平板、压型)
应用：适用于烘房、烤漆房、工业设备、建筑、船舶的绝热、隔音等，同时适用于电子洁净房、净化房、防暴防火车间吊顶、隔断等。


Composition：Using high-density rock wool as the core material, coated or color coated plate as the surface layer of two layers and high-strength adhesive, through high-speed continuous automatic molding machine heating, pressure composite, a new generation of building and decoration board, which is made by trimming, cutting and cutting, has the characteristics of heat preservation, heat insulation and convenient installation. It is a new type of fire-proof board with the strongest fire-resistant performance in the same type of Sandwich Board series.
Specifications：Width: 950、1150 mm
Thickness：50、75、100、150、200 mm
Length：According to engineering requirements and transportation conditions custom
Color：According to engineering requirements to select
Varieties：Enterprise plate, corrugated sandwich plate, compression
Application：Suitable for baking room, paint room, industrial equipment, construction, ship insulation, sound insulation, etc. , at the same time, it is suitable for electronic clean room, clean room, anti-riot and anti-fire workshop ceiling, partition, etc.

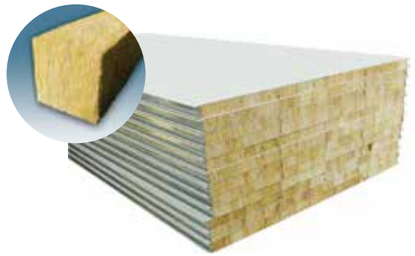

纸蜂窝彩钢净化板
Paper honeycomb color steel purification board

构成：纸蜂窝夹芯彩钢板是以彩色涂层为面板，以纸蜂窝为芯材，用热固化胶在连续成型机内加热加压复合而成的超轻建筑板材。产品自重轻、隔断性能好、隔声效果好、施工速度快。
规格：宽度：950、1150mm
厚度：50、75、100、150、200mm
长度：按工程要求及运输条件定做
颜色：按工程要求选取
品种：H板(平板、压型)、企口板
应用：广泛用于电子、生物、食品、制药、医院等洁净建筑领域隔断生产车间。

Composition：The paper honeycomb sandwich color steel plate is an ultra-light construction plate which is made of color coating, paper honeycomb as core material and heat-curing glue in continuous forming machine. Light deadweight, good insulation performance, sound insulation effect, construction speed.
Specifications：Width: 950、1150 mm
Thickness：50、75、100、150、200mm
Length：Custom-made according to engineering requirements and transportation conditions
Color：According to engineering requirements
Varieties：H Flat Plate, press type, plate
Application：Widely used in electronic, biological, food, pharmaceutical, hospital and other clean building field partition production workshop.

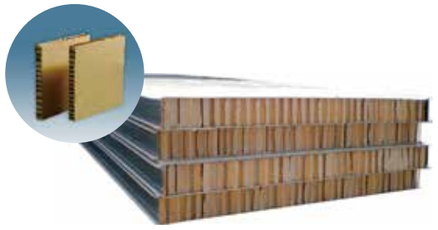

中空玻镁彩钢净化板
Hollow glassy magnesium colored steel plate

构成：以彩涂钢板为面材，以中空玻镁为芯材，用热固化胶在连续成型机内加压复合而成的轻质建筑板材。玻镁板以硫酸镁为主原料，经配置和加以改性剂而制成，性能稳定不易返卤，表平面配玻纤网格布复合而成的新型不燃装饰材料。采用特殊生产工艺加工而成，具有防火、防水、无味、无毒、不冻、不腐、不裂、不变、不燃、高强质轻等特点。
规格：长度：可根据客户的需求(一般≤6000mm)
宽度：标准板：1150mm
厚度：50、75、100、150、200mm
应用：广泛用于电子、生物、食品、制药、医院等洁净建筑领域，尤其适用于高洁净级别的生产车间和仓库。

Composition：The Light Construction Board is made of colored coated steel plate, Hollow glass-magnesium as core material, and heat-cured glue in continuous forming machine. The glass-magnesium board is made of magnesium sulfate as the main raw material, and it has stable property and is not easy to be halogenated. Made by special production technology, it is fireproof, waterproof, tasteless, non-toxic, non-freezing, non-corrosive, non-cracking, non-changing, non-burning, high strength and light weight.
Specifications：Length: According to the customer's requirements generally ≤6000mm
Width: Standard Plate：1150mm
Thickness：50、75、100、150、200mm
Applications：Widely used in electronic, biological, food, pharmaceutical, hospital and other clean building areas, especially for high-level clean production workshops and warehouses.



硫氧镁彩钢净化板
Magnesium thiooxide color steel plate

构成：采用硫酸镁、氧化镁、聚苯颗粒、化工助剂等生产的一种硫氧镁高强度净化彩钢板。
规格：上/下钢板厚度0.4----0.8mm彩涂钢板。
芯材：硫氧镁容重220----280kg/m³。厚度50mm----200mm。
启口式有效宽度：1150mm，长度不限。
板面保护形式：覆PVC保护膜。
应用：广泛用于电子、生物、食品、制药、医院等洁净建筑领域，尤其适用保温性能要求较高的生产车间和仓库。

Composition：The utility model relates to a high-strength purifying color steel plate made of magnesium sulfate, magnesium oxide, polystyrene particles, chemical additives and the like.
Specification: Upper / lower steel plate thickness 0.4 -- 0.8 mm color coated steel plate.
Core material: Magnesium oxysulfide 220kg / M3. Thickness 50 mm ——200 mm.
Mouth opening type effective width: 1150mm, length is not limited.
Surface protection type: PVC coated protective film.
Application: Widely used in electronic, biological, food, pharmaceutical, hospital and other clean building areas, especially for the thermal insulation performance requirements of the production workshop and warehouse.



P 传递窗
ass-throughs

传递窗作为洁净室的一种辅助设备——

主要用于洁净区与洁净区、非洁净区与洁净区之间的小件物品的传递，以减少洁净室的开门次数，最大限度的降低洁净区的污染。
传递窗采用不锈钢板制作,平整光洁。双门互为连锁,有效阻止交叉污染,设有电子或机械连锁装置,并配置紫外线杀菌灯。
传递窗广泛应用于微细科技、生物实验室、制药厂、医院、食品加工业、LCD、 电子厂等一切需要空气净化的场所。
It is mainly used for the transfer of small items between clean area and clean area, non clean area and clean area, so as to reduce the opening times of clean room and minimize the pollution of clean area.
The transfer window is made of stainless steel plate, smooth and smooth. The double doors are interlocked with each other to effectively prevent cross contamination, with electronic or mechanical interlocking device, and equipped with ultraviolet germicidal lamp.
Transfer window is widely used in micro technology, biological laboratory, pharmaceutical factory, hospital, food processing industry, LCD, electronic factory and other places that need air purification.

传递窗3大分类

01
电子连锁传递窗
Electronic chain transfer window





02
机械连锁传递窗
Mechanical interlocking transmission window

03
自净式传递窗
Self cleaning transfer window



A 风淋室
ir shower

风淋室是一种通用性较强的局部净化设备，安装于洁净室与非洁净室之间的隔墙处，
用于人员或物体进入洁净区时的吹淋除尘。
使用后可有效和减少尘源进入洁净区，使洁净区保持正常的工作状态。


广泛适用于食品饮料、电子、医药卫生等各种行业及科研领域。

Air shower is a kind of universal local purification equipment, which is installed in the partition between clean room and non clean room,
It is used for blowing and dedusting when people or objects enter the clean area.
After use, it can effectively reduce and reduce the dust source into the clean area, and keep the clean area in normal working condition.


Widely used in food and beverage, electronics, medicine and health and other industries and scientific research fields.




结构示意图/Structure diagram

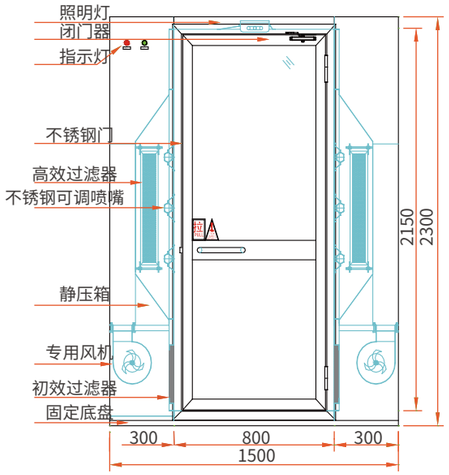

A向示意图

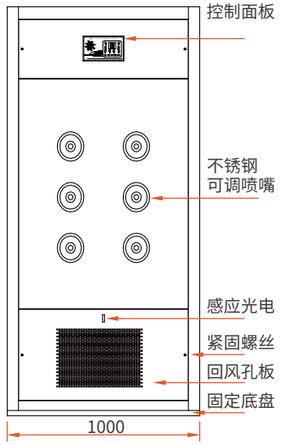

A- A″

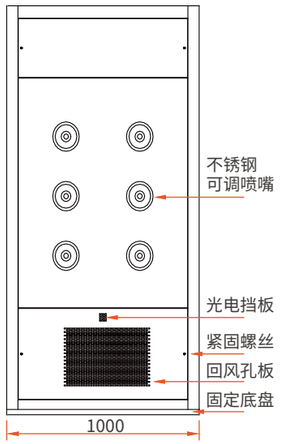

B- B″

	TD-AS-①L TD-AL-①L	TD-AS-②L TD-AL-②L	TD-AS-③L TD-AL-③L	TD-AS-④L TD-AL-④L
参　数				
过滤效率	≥99.99100%			
喷出风速	>20(m/s)			
风淋时间	0-99s(mm)			
喷嘴直径及数量	Φ36 mm.12个	Φ36 mm.24个	Φ36 mm.36个	Φ36 mm.48个
风淋区尺寸(mm)	W800×D900×H1950	W800×D1900×H1950	W800×D2900×H1950	W800×D3900×H1950
外箱体	冷轧烤漆钢板或不锈钢处理			
盘底	不锈钢底板			
供电电源	AC,3N,380V±10%,50Hz±2Hz			
最大功耗(W)	1100W	2200W	3300W	4400W
包装参数				
质量(Kg)	500	1000	1500	2000
外型尺寸(mm)	W1400×D1000×H2100	W1400×D2000×H2100	W1400×D3000×H2100	W1400×D4000×H2100
配件资料				
初效过滤规格/数量	600×350×10×2只	600×350×10×4只	600×350×10×6只	600×350×10×8只
高效过滤规格/数量	610×610×69×2只	610×610×69×4只	610×610×69×6只	610×610×69×8只

P净化灯
urification lamp

斜边不锈钢边框，镜面全内胆，透明有机玻璃吸顶式净化灯，照明度特强，反光效果好，不锈钢边框年久不腐蚀，外形美观。密封性好、抗干扰、不积尘、易洁净。此灯适用于制业、生物化工业、食品加工业等，凡需净化区域均需采用此类净化灯具照明。也适用于高要求、高标准确性的净化车间及高档办公室等。

Beveled stainless steel frame, mirror full liner, transparent plexiglass ceiling purification lamp, strong illumination, good reflective effect, stainless steel frame for a long time without corrosion, beautiful appearance. Good sealing, anti-interference, no dust, easy to clean. This lamp is suitable for manufacturing industry, biochemical industry, food processing industry, etc. all areas requiring purification need to use this kind of purification lamp for lighting. It is also suitable for purification workshops and high-grade offices with high requirements and high standard accuracy.



铝合金本色拉丝边框嵌入式净化灯
Aluminum alloy spraying frame embedded purification lamp



铝合金边嵌入式净化灯
Aluminum alloy edge embedded purification lamp



铝合金喷塑料斜边嵌入式净化灯
Aluminum alloy spray plastic bevel embedded purification lamp



不锈钢直边净化灯
Stainless steel straight edge purification lamp



不锈钢边框带反光透明罩净化灯
Stainless steel frame with reflective transparent cover purification lamp



不锈钢斜边净化灯
Stainless steel beveled edge purification lamp



杀菌灯
Germicidal lamp



泪珠灯
Tear lamp



弯管杀菌灯
Elbow sterilization lamp

全密封超薄型净化灯

功率	电压	形L×W×H
3×40W	Ac220 50Hz	1330×400×60
2×40W	Ac220 50Hz	1330×300×60
1×40W	Ac220 50Hz	1330×190×60
2×30W	Ac220 50Hz	1030×300×60
1×30W	Ac220 50Hz	1030×190×60
2×20W	Ac220 50Hz	730×300×60

不锈钢边框带反光透明罩净化灯

功率	电压	外形尺寸			开孔尺寸	
		L	W	H	L	W
3×40W	Ac220 50Hz	1250	350	75	1220	320
2×40W	Ac220 50Hz	1250	240	75	1220	210
1×40W	Ac220 50Hz	980	240	75	950	210
2×30W	Ac220 50Hz	740	240	75	710	210
1×30W	Ac220 50Hz	1250	210	75	1220	180
2×20W	Ac220 50Hz	980	210	75	980	180
1×20W	Ac220 50Hz	730	210	75	710	180

F 过滤器
ilter

空气过滤器用于过滤空气中的颗粒物。过滤器分初效、中效、中高效、亚高效和高效。

常见的净化方法包括机械过滤、吸附、静电除尘、负离子和等离子体法及静电驻级过滤等。

Air filters are used to filter particles in the air. The filter is divided into primary efficiency, medium efficiency, medium efficiency, sub efficiency and high efficiency.

The common purification methods include mechanical filtration, adsorption, electrostatic precipitator, negative ion and plasma method, electrostatic stationary filtration and so on.

过滤等级：

初效过滤器	粒径	中效过滤器	粒径	高中效过滤器	粒径	亚高效过滤器	粒径	高效过滤器	粒径
E≥20%	≥5.0μm	50>E≥30%	≥1.0μm	99>E≥70%	≥1.0μm	99>E≥95%	≥0.5μm	E≥99.9%	≥0.5μm
50>E≥20%	≥5.0μm	80>E≥50%	≥1.0μm	90>E≥75%	≥1.0μm	99.9>E≥99%	≥0.5μm	E≥99.99%	≥0.5μm
70>E≥50%	≥5.0μm	/		99>E≥90%	≥1.0μm	/		/	
90>E≥70%	≥5.0μm	/		/		/		/	



上/下液槽无隔板高效过滤器
High efficiency filter without diaphragm in upper / lower liquid tank

无隔板高效过滤器
High efficiency filter without diaphragm

耐高湿高效过滤器
High humidity resistant high efficiency filter

耐高温高效过滤器
High temperature resistant high efficiency filter



W型空气过滤器
W-type air filter



塑料W过滤器
Plastic w filter



中效袋式过滤器
Medium efficiency bag filter



初效过滤器
Primary filter

S 不锈钢产品
tainless steel products










































A 铝型材
luminum profile



外圆柱
Outer cylinde



T字铝
T-type aluminum



老式窗框铝
Old window frame aluminum



工字铝
The word aluminum



槽铝
The word aluminum



门框铝
Door frame aluminum



重型大梁
Heavy girde



吊顶大梁
Ceiling beam



中字铝
In the word aluminum



内圆弧
Internal arc



双密封门料
Double sealed door material



固定窗框铝
Fixed window frame aluminum



单R槽铝
Single R tank aluminum



双R槽铝
Double R tank aluminum

C 合作单位
ooperative unit

三星电子　中达电子　中国电子　中电二公司　中电四公司　中国电联

方正科技　西宁比亚迪　冠捷电子　友达光电　台光电子　协鑫光伏

清华同方微电子　华映视讯　中国科技大学　哈药集团制药六厂　天津医科大学总医院　浙江医药

富士康科技集团　天师　天津市血液病医院　天威集团　长春光机所　上海光机所

京新制药　亚太药业　民生药业　东瑞制药　联邦制药　金陵药业

E 工程案例
ngineering Case

食品行业净化工程
Purification engineering of food industry

现代人的食品安全意识日益提高，为了确保食品安全，必须把微生物含量控制在合理范围内。通过食品车间净化，不但能提高食品的安全性，还可以改善风味，优化加工流程。

Modern people's awareness of food safety is increasing. In order to ensure food safety, the microorganism content must be controlled within a reasonable range. Through food workshop purification, not only can improve the safety of food, but also can improve flavor, optimize the processing process.







医药行业净化工程
Purification engineering of pharmaceutical industry

关键技术主要在于控制尘埃和微生物，作为污染物质，微生物是医药厂房洁净室环境控制的重中之重。

The key technology mainly lies in the control of dust and microorganisms. As pollutants, microorganisms are the top priority of clean room environmental control in pharmaceutical plants.






医疗卫生行业净化工程
Purification engineering of medical and health industry

采用手术室净化工程，术后感染库从8.9下降为0.26.手术室净化已成为医院医疗水平重要指标，尤其在一些大型医院，更需要高级别的净化手术室提供高难度复杂手术如器官移植等的适宜空间。

With the use of operating room purification engineering, the postoperative infection pool decreased from 8.9 to 0.26. Operating room purification has become an important indicator of hospital medical level, especially in some large hospitals, it is more necessary for high-level purification operating room to provide suitable space for difficult and complex operations such as organ transplantation.

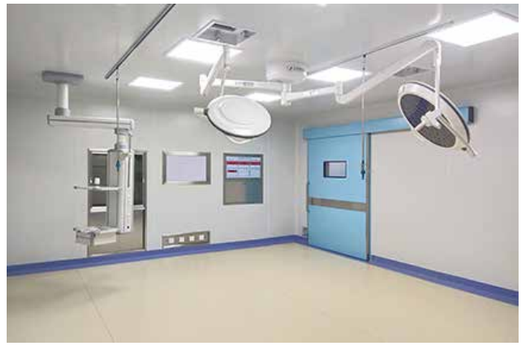



日化品行业净化工程
Purification engineering of daily chemical products industry

日化品在生产过程中会产生粉尘或者使用有害、易燃、易爆原料的产品必须使用单独车间，且车间应当平整，耐磨、防滑、易清洁消毒；本公司会按照相应的卫生规范打造符合各项标准的生产车间，确保日化品在生产、静置、灌装、包装等环节产生的二级污染降到最低程度。

Daily chemical products that may produce dust in the production process or use harmful, flammable or explosive raw materials must use a separate workshop, and the workshop shall be smooth, wear-resistant, skid resistant and easy to clean and disinfect; The company will build production workshops in accordance with the corresponding hygiene standards to ensure that the secondary pollution caused by daily chemical products in the production, standing, filling, packaging and other aspects is reduced to a minimum.





实验室净化工程
Laboratory purification engineering

空气中的微尘和离子都会干扰实验过程，影响实验的精准度，尤其在一些高精尖科技研发场所，对于微尘离子有着近乎苛刻的要求。

Dust and ions in the air will interfere with the experimental process and affect the accuracy of the experiment. Especially in some high-tech research and development sites, there are almost strict requirements for dust ions.





展望未來
Looking to the future

工欲善其事，必先利其器，吉欧特严格遵照：开拓创新、持续改进、品质为王、永续经营的管理理念，致力于具有技术精湛，作风过硬的产品生产、设计、安装队伍的培养，保证产品质量与工程质量满足客户要求，并在工程项目执行期间及项目完成后提供高质量的售后服务，为创造一个舒适、洁净、健康、安全的工作生活空间而不懈努力。期待与您建立相互信任，真诚合作的良好关系，秉承传统、创造经典，让我们同耕耘同成长，幸福收成同分享。

To do a good job, one must first sharpen his tools. Jioute strictly follows the management philosophy of pioneering and innovation, continuous improvement, quality as the king, and sustainable operation, to ensure product quality and engineering quality meet customer requirements, and to provide high quality after-sales service during and after the completion of the project, to create a comfortable, clean, healthy, safe working and living space and unremitting efforts. We are looking forward to establishing a good relationship of mutual trust and sincere cooperation with you, adhering to tradition and creating classics. Let us work together to grow and share the harvest with happiness.